

## PCI-ADI

### FEATURES

- Compatible with Legacy RTP ADI Devices
- Uses Existing RTP I/O Cables
- RoHS Compliant
- PCI Local Bus-Compliant with PCI Revision 2.3
- Eliminates ADI Application Code Rewrite under LCRS


### BENEFITS

- Low Host CPU Overhead
- Fast Deployment
- Low-Risk/ Low-Cost Replacement Solution

COMPRO's PCI-ADI interface provides an easy-to-install, commercial off-the-shelf (COTS) solution for replacing your system's legacy SeIBUS ADI board. The PCI-ADI connects a PCI-based host to one or more legacy RTP Corporation analog/digital subsystems. Communication to the subsystems is via the existing RTP Serial Interface.

Serial ports on the dual-channel PCI-ADI connect to RTP Serial Interface boards using existing coaxial cables. The PCI-ADI faceplate contains 6 LEDs indicating the power, operational, and transmission status.

The PCI-ADI plugs into a 32-bit PCI bus slot up to 66 MHz and is compatible with 3.3V and 5V PCI signaling levels. The edge connector of the PCI-ADI is keyed as a Universal Add-In board.

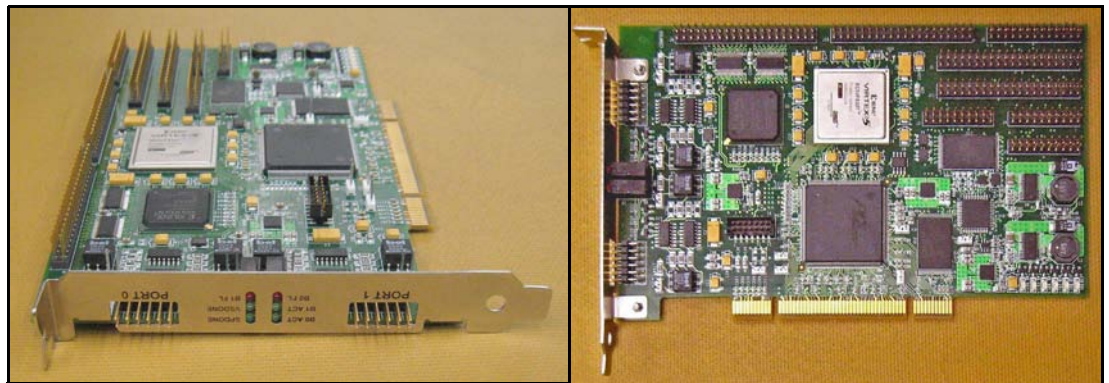

### Characteristics

COMPRO's PCI-ADI has the following characteristics:

- Complete compatibility with RTP Serial Interface 1 and 2 boards
- ROM Simulator Port pin compatibility with legacy ROM simulator and diagnostic processor boards
- ADI FPGA is functionally identical to the legacy SeIBUS ADI board (part numbers 160-103054-00x and 160-103813-001)
- Two 10-megabit per second serial ports
- Drive and receive capabilities for coaxial cable lengths up to 250 feet
- Communication to the host system via mailbox registers accessible from the PCI bus
- Access to host memory through PCI initiator memory access
- PCI target interface receives commands from host system
- Automatic status posting
- Support for command chaining, transfer in channel, continue on non-present memory error, random mode, sequential mode, and repeat mode
- PCI scatter/gather support accomplished by host-programmed page table entries
- Operates in a 32-bit 3.3V/5V PCI expansion slot
- LCRS interrupt state support



PCI-ADI (Cont'd)

## Interfaces

- Supports any combination of the following ADI interface buss classes:
  - Analog Input (AI)
  - Analog Output (AO)
  - Digital Input (DI)
  - Digital Output (DO)
- Connects with one to eight RTP subsystems
- Fully supports all standard RTP chassis cards including:
  - Digital Input/Output
  - Universal Input/Output
  - Analog Output
  - High-Level Analog Input
  - Low-Level Analog Input
  - Programmable Pulse, Frequency and Delay Counters
  - Gates and Relays

## Specifications

Specification	Description
<b>COMPRO Part Number</b>	
	160-113470-001
<b>Compliances</b>	
	RoHS compliant
	PCI local bus-compliant with PCI revision 2.3
<b>Physical Characteristics</b>	
<b>Depth</b>	4.2 inches (10.67 centimeters)
<b>Height</b>	6.95 inches (17.65 centimeters)
<b>Weight</b>	1.2 lbs (0.54 kilograms)
<b>Environmental Characteristics</b>	
<b>Operating</b>	• Temperature: 32° F to 131° F (0° C to 55° C)
	• Relative Humidity: 0% to 90%
	• Altitude: 0 to 10,000 AMSL (0 to 3,048 meters)
<b>Storage</b>	• Temperature: -40° F to 176° F (-40° C to 80° C)
	• Relative Humidity: 0% to 90%
	• Altitude: 0 to 40,000 AMSL (0 to 12,192 meters)
<b>Electrical</b>	Voltage 5.0 VDC ± 5% 3.3 VDC ± 5%



COMPRO Computer Services, Inc.  
105 East Drive  
Melbourne, Florida U.S.A.  
Tel: (800) 936-2673  
www.compro.net



### INTERNATIONAL BUSINESS PARTNERS



**Brazil**  
Flight Simulator System, Ltda.  
Tel: +55 (12) 3322-0470  
www.fssbrasil.com.br

**Japan**  
Japan Encore Computer, Inc.  
Tel.: +81-3-5791-4940

**Italy**  
Encore Real Time Computing S.r.l.  
Tel.: +39 0362 300433  
www.encore.it

**Spain**  
Encore Real Time España S.A.  
Tel.: +34-981-288404

**United Kingdom**  
COMPRO Services Ltd.  
Tel.: +44 (0) 1252 852228  
www.compro-uk.com

**Germany**  
Encore Real Time Computing GmbH  
Tel.: +49 21 31 92 43 32